



SMART AND SAFE QUICK CHANGER QCY SERIES




Reduced Thickness

QC50
QC90
QC150
QC160
QC200

3 Kg UP TO
75 Kg PAY LOAD
5÷150 Kg




Safe Engagement



QCX90-A
QCX150-A
QCX160-A
QCX200-A

INDIPENDENT
VALVE LEVER

THIN THICKNESS
+
SAFE ENGAGEMENT

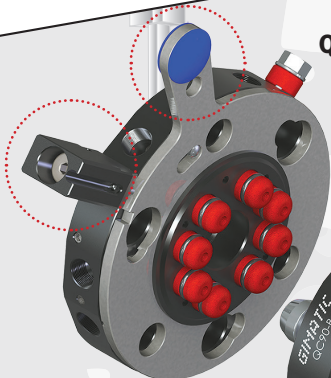

QCY50-A
QCY90-A
QCY150-A
QCY200-A

MECHANICAL + AIR +
ELECTRICAL COUPLING



QC...-B

- One lever which allows the coupling of the EOAT and simultaneously the pneumatic connections switching.
- Up to 12 ports for pressure and vacuum.
- 15 electrical connections (optional).
- Lightweight thin thickness.
- Quick tool change on the robot.
- LOQC locking unit integrated (optional sensor).
- It prevents mistakes in the pneumatic and electrical connections.






CONNECTOR AND ACCESSORIES QC SERIES



RFID
IDENTIFICATION

CQC-012
CQC-013





BRACKETS FOR
DOUBLE
CONNECTOR



GUIDE PINS TO MAKE
EASIER THE
CONNECTION OF
HEAVY EOATS

QC9065
QC150100
QC200120






EXTRA AIR
PORTS

QCA90

NEW



QCP INTEGRATED
FLANGE MFI-A103

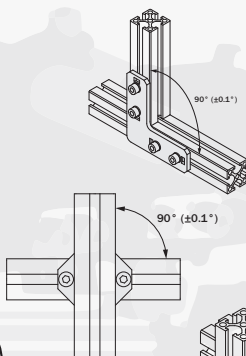

HIGH PRECISION
COMPONENTS

- MFI-A353
- MFI-A356

- QCP50-B
- QCP90-B
- QCP150-B
- QCP160-B
- QCP200-B

